


漆筒印花机
 Roller heat transfer machine
 (800型)



卷对卷款
 Roll-to-roll standard machine

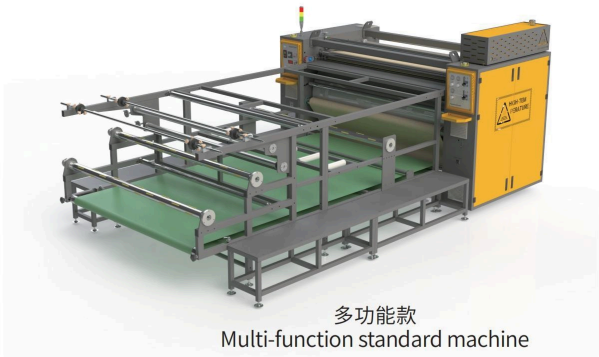

多功能款
 Multi-function standard machine

机器参数 / Machine parameters

800型漆筒印花机配置及参数 (HJD-DP07-05) Multi-function standard machine configuration and parameters		
电源配置/Power configuration	三相四线 380V/50Hz/ Three-phase four-wire 380V/50Hz	
加热方式/Heating method	加热管油温型/Heating tube oil temperature type	
滚筒直径/Drum diameter	800mm	
转移产量/Transfer production	0-800m/h	
满油/Full of oil	100%满油/100% full of oil	
油箱放置方式/How the tank is placed	外置开放式/Exterior open	
油位显示/Oil level display	有/Yes	
操作方式/Mode of operation	按钮操作/button actions	
自动开关机/Automatic power on and off	定时关机/Shut down regularly	
毛毡自动纠偏系统/Felt automatic guiding system	有/Yes	
轴承加油机/Bearing dispenser	便于给加热辊轴承加油延长轴承寿命防止抱死 Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	
防夹手/Anti pinch hands	防止操作人员操作时夹手烫伤/Prevent operators from getting burned by pinching their hands during operation	
	卷对卷款 Roll-to-roll standard machine	多功能款 Multi-function standard machine
型号/Model	800×1900/2600/3200	800×1700/1900/2600/3200
功率/power	70KW/98KW/120KW	75KW/75KW/100KW/120KW
印花有效面积/Print effective area	1900/2600/3200mm	1700/1900/2600/3200mm
滚筒涂层/Roller coating	发蓝+气相防锈纸保护/Bluing process+vapor phase rust proof paper protection	特氟龙/Teflon
毛毡材料/Felt material	100%芳纶Nomex, 8/10/10mm	100%芳纶Nomex, 10mm
占地尺寸/Footprint dimensions	/	4900*2800/3000/3800/4400*2000mm
包装尺寸/Package dimensions	/	2800/3000/3700/4300*1590*2400mm
重量/Weight	净重/Net weight : 500/4000/4800kg	净重/Net weight :3500/3800/4500/5200kg 毛重/Gross weight :3700/4000/4700/5400kg
工作台长度/Table length	/	2m (需客户自备钢化玻璃/User-supplied tempered glass: 2000*1780/2000/2700/3300*10 一块/pcs)
气涨轴/Air rising shaft	5根铝/铁制;放画纸1根,收画纸1根,放衬纸1根,收衬纸1根,收布料1根 (直径73) 5 pieces of aluminum/iron: 1 drawing paper, 1 drawing paper, 1 backing paper, 1 backing paper, 1 cloth (diameter 73)	5根铝制;放画纸2根,收画纸1根,放衬纸1根,收衬纸1根 (直径73) 5 pieces of aluminum: 2 pieces of drawing paper, 1 piece of backing paper, 1 piece of collecting paper, 1 piece of backing paper (diameter 73)
脚踏板/Foot pedals	无/No	标配/Standard
压力辊/Pressure roll	1支/pcs	2支/pcs
触摸屏/touch screen	按钮控制改为触摸屏控制,增加7×24小时自动开关机及定温关机等功能 The button control was changed to touch screen control, and functions such as a automatic power on and off and constant temperature shutdown were added × 7	无/No
卷对卷款可升级配置 Volume to volume upgradable configuration	多功能款可升级配置 Multi functional upgradable configuration	
1.自动收卷:独立自动收卷机或集成在工作台上,一步到位不用再上打卷机收卷 2.离合器:手动离合可升级为1.磁粉离合 2.气动离合,可视化张力调整避免进料褶皱 3.排烟系统:减少室内转印时产生的油烟 4.安全卡盘:气涨轴安装方便,可有效防止夹手 5.Wifi功能:连接Wifi功能后可使用手机远程控制 1.Auto Rewinding: Independent auto rewinder or workbench integrated design; one-step finishing, no extra rewinding equipment needed. 2.Clutch: Manual clutch can be upgraded to ① Magnetic Powder Clutch ② Pneumatic Clutch; visualized tension adjustment to avoid feeding wrinkles. 3.Smoke Exhaust System: Reduces oil fume generated during heat transfer operation. 4.Safety Chuck: Easy installation with air expansion shaft; effectively prevents hand pinching injuries. 5.Wi-Fi Function: Supports Wi-Fi connection for mobile remote control.	1.自动收卷:独立自动收卷机或集成在工作台上,一步到位不用再上打卷机收卷 2.离合器:手动离合可升级为1.磁粉离合 2.气动离合,可视化张力调整避免进料褶皱 3.触摸屏:按钮控制改为触摸屏控制,增加7×24小时自动开关机及定温关机等功能 4.自动分离:毛毡自动张紧自动分离,减少降温等待时间 5.排烟系统:减少室内转印时产生的油烟 6.安全卡盘:气涨轴安装方便,可有效防止夹手 7.兜布槽:布料无需穿轴,放入滑动槽中即可 8.Wifi功能:连接Wifi功能后可使用手机远程控制 9.独立电箱:电箱独立主机外 延长电器寿命 10.高低功率切换:满足不同区域客户高低功率需求 11.硅胶辊:铁辊升级为硅胶辊 12.上布纠偏:进料居中,便于收集 13.面料水冷:厚/特殊面料,快速降温,防止变形,污染 14.集烟罩:收集转印过程中油墨升华产生的烟雾 1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine. 2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles 3. Touch screen: button control changed to touch screen control, adding functions such as 7 × 24-hour automatic power on/off and constant temperature shutdown 4. Automatic separation: The felt automatically tightens and separates, reducing waiting time for cooling 5. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing 6. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping 7. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove 8. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it 9. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside 10. High and low power switching: meet the high and low power needs of customers in different regions 11. Silicone roller: iron roller upgraded to silicone roller 12. Correction of upper fabric: The feeding is centered for easy collection 13. Fabric water cooling: Thick/special fabric, fast cooling to prevent deformation and pollution 14. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process	