


滚筒印花机
 Roller heat transfer machine
 (1000型)



卷对卷款
 Roll-to-roll standard machine

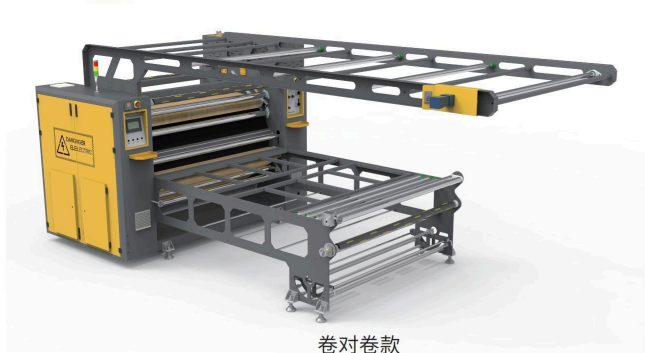

多功能款
 Multi-function standard machine

机器参数 / Machine parameters

1000型滚筒印花机配置及参数 (HJD-DP07-06)		
Multi-function standard machine configuration and parameters		
电源配置/Power configuration	三相四线 380V/50Hz/ Three-phase four-wire 380V/50Hz	
加热方式/Heating method	加热管油温型/Heating tube oil temperature type	
滚筒直径/Drum diameter	1000mm	
转移产量/Transfer production	0-1200米/小时h	
满油/Full of oil	100%满油/100% full of oil	
油箱放置方式/How the tank is placed	外置开放式/Exterior open	
油位显示/Oil level display	有/Yes	
操作方式/Mode of operation	按钮操作/button actions	
自动开关机/Automatic power on and off	定时关机/Shut down regularly	
毛毡自动纠偏系统/Felt automatic guiding system	有/Yes	
轴承加油机/Bearing dispenser	便于给加热辊轴承加油延长轴承寿命防止抱死 Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	
防夹手/Anti pinch hands	防止操作人员操作时夹手烫伤/Prevent operators from getting burned by pinching their hands during operation	
	卷对卷款 Roll-to-roll standard machine	多功能款 Multi-function standard machine
型号/Model	1000x1900/2600/3200	1000x1900
功率/power	85/120/150KW	85KW
印花有效面积/Print effective area	1900/2600/3200mm	1900mm
滚筒涂层/Roller coating	发蓝+气相防锈纸保护/Bluing process +vapor phase rust proof paper protection	发蓝+气相防锈纸保护/Bluing process +vapor phase rust proof paper protection
毛毡材料/Felt material	100%芳纶 Nomex, 10/10/12mm	100%芳纶 Nomex, 10mm
占地尺寸/Footprint dimensions	/	5300*3100*2300mm
包装尺寸/Package dimensions	/	3100*1850*2500mm
重量/Weight	净重/Net weight 3500/4000/4800kg	净重/Net weight :4500kg ; 毛重/Gross weight: 4700kg
工作台长度/Table length	/	2m (需客户自备钢化玻璃/User-supplied tempered glass:2000*2000*10 一块/pc)
气胀轴/Air rising shaft	5根铝/铁制:放画纸1根,收画纸1根,放衬纸1根,收衬纸1根,收布料1根 (直径73) 5 pieces of aluminum/iron: 1 drawing paper, 1 drawing paper, 1 backing paper, 1 backing paper, 1 cloth (diameter 73)	5根铝制:放画纸2根,收画纸1根,放衬纸1根,收衬纸1根 (直径73) 5 pieces of aluminum: 2 pieces of drawing paper, 1 piece of collecting paper, 1 piece of backing paper, 1 piece of backing paper (diameter 73)
脚踏板/Foot pedals	/	标配/Standard
压力辊/Pressure roll	2支/pcs	2支/pcs
触摸屏/touch screen	/	按钮控制改为触摸屏控制,增加7×24小时自动开关机及定温关机等功能 Button control upgraded to touchscreen control; added 7×24h auto power on/off, temperature-set shutdown and other functions
防夹手/Anti-pinch hand	防止操作人员操作时夹手烫伤 Prevent the operator from burning his hands	防止操作人员操作时夹手烫伤 Prevent the operator from burning his hands
轴承加油机/Bearing dispenser	便于给加热辊轴承加油延长轴承寿命防止抱死 Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up	便于给加热辊轴承加油延长轴承寿命防止抱死 Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up
卷对卷款可升级配置 Volume to volume upgradable configuration	多功能款可升级配置 Multi functional upgradable configuration	
1.自动收卷:独立自动收卷机或集成在工作台上,一步到位不用再上打卷机收卷 2.离合器:手动离合可升级为1.磁粉离合 2.气动离合,可视化张力调整避免进料褶皱 3.排烟系统:减少室内转印时产生的油烟 4.安全卡盘:气涨轴安装方便,可有效防止夹手 5.Wifi功能:连接Wifi功能后可使用手机远程控制 1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine 2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles 3. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing 4. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping 5. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove 6. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it 7. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside	1.自动收卷:独立自动收卷机或集成在工作台上,一步到位不用再上打卷机收卷 2.离合器:手动离合可升级为1.磁粉离合 2.气动离合,可视化张力调整避免进料褶皱 3.排烟系统:减少室内转印时产生的油烟 4.安全卡盘:气涨轴安装方便,可有效防止夹手 5.无纺布:布料无需穿轴,放入滑动槽中即可 6.Wifi功能:连接Wifi功能后可使用手机远程控制 7.独立油箱:油箱独立主机外 延长电器寿命 8.高低功率切换:满足不同区域客户高低功率需求 9.硅胶辊:铁辊升级为硅胶辊 10.上布纠偏:进料居中,便于收集 11.面料水冷:厚/特殊面料,快速降温,防止变形,污染 12.集烟罩:收集转印过程中油墨升华产生的油雾 1. Automatic winding: an independent automatic winding machine or integrated on the workbench, which can be wound in one step without the need for a winding machine 2. Clutch: Manual clutch can be upgraded to 1. Magnetic powder clutch 2. Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles 3. Smoke exhaust system: reduce the oil fume generated during indoor transfer printing 4. Safety chuck: The inflation shaft is easy to install and can effectively prevent hand clamping 5. Bag groove: The fabric does not need to be threaded, just put it into the sliding groove 6. Wifi function: After connecting to the Wifi function, you can use your phone to remotely control it 7. Independent electrical box: The electrical box extends the service life of electrical appliances by having an independent host outside 8. High and low power switching: meet the high and low power needs of customers in different regions 9. Silicone roller: Iron roller upgraded to silicone roller 10. Correction of upper fabric: The feeding is centered for easy collection 11. Water cooling of fabrics: Thick/special fabrics, fast cooling to prevent deformation and pollution 12. Smoke hood: collects the oil mist generated by ink sublimation during the transfer printing process	