


导带印花机 High Speed Digital Direct Textile Printer

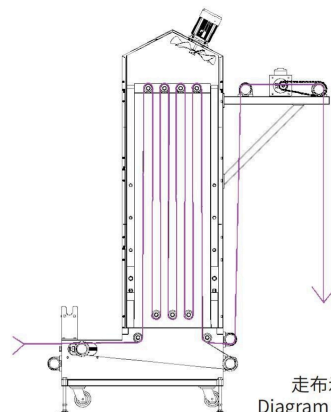

走布示意图
Diagram of feeding

机器参数 / Machine parameters

产品型号Product model:HJD-DP15

设备名称 Device name	蒸汽机Steamer		供电规格及功率 Power supply and power	三相380V,约30kw
设备尺寸 Device dimensions	3550*1650*2500mm (L*W*H)	2750*1650*2500mm (L*W*H)	最高工作温度 Maximum operating temperature	190℃ (有蒸汽参与时) 配蒸汽发生器 190℃ (with steam participation) with steam generator
工作布幅 Working cloth	2.5米, 通过幅宽2.7米 2.5 meters, 2.7 meters wide through	1.8米, 通过幅宽1.9米 1.8meters, 1.9 meters wide through	产能 Capacity	4分钟/米, 约240米/小时 4 minutes/m, about 240 m/h
设备重量 Device weight	1320KG	1020KG	蒸箱容量 Steam box capacity	15meters
引布方式 Routing method	不锈钢链条引布或衬布引布, 使用针钉后进行工作 Stainless steel chain or interlined leads, Work is carried out after using needle nails		速度 velocity	无极变频调速, 全程无张力同步运行 Stepless frequency conversion speed regulation, no in the whole process The tension runs synchronously
进布方式 In and out of the cloth way	A. 卷装进布机构和高架吸边器齐边进布双配置 B. 高布架出布 A. Roll into the cloth mechanism and overhead edge suction device side into the cloth double configuration B. High cloth rack out of cloth			
产品特点优势 Product features and advantages	1, 本设备适用于纺织印染整、化工染料助剂企业化验室或车间进行织物染色印花或上浆后的汽蒸固色, 将染料与纺织纤维完美结合, 使产品色泽鲜亮, 发色及固色效果显著稳定。 2, 本设备占地面积小, 可以满足各种纺织服装面料的多品种、个性化、小批量生产订单需求, 具有低污染、低消耗、低排放、高附加值等特点, 极大的降低了单位米布的固色成本 1. This equipment is suitable for textile printing and dyeing and finishing, chemical dye auxiliaries enterprise laboratory or workshop for fabric dyeing and printing or steam fixing after sizing, and the dye and textile fiber are completed. The combination of beauty makes the color of the product bright, and the hair color and color fixing effect are significantly stable. 2. The equipment occupies a small area, which can meet the multi-variety, personalized, and small batch production order needs of various textile and garment fabrics with low pollution, low consumption, low emissions and high added value and other characteristics, greatly reduce the fixing cost of unit rice cloth			