


UV多功能打印机（圆柱/平面/卷材三合一）

Cylindrical/Flatbed/Roll-to-Roll
3-in-1 UV Printer

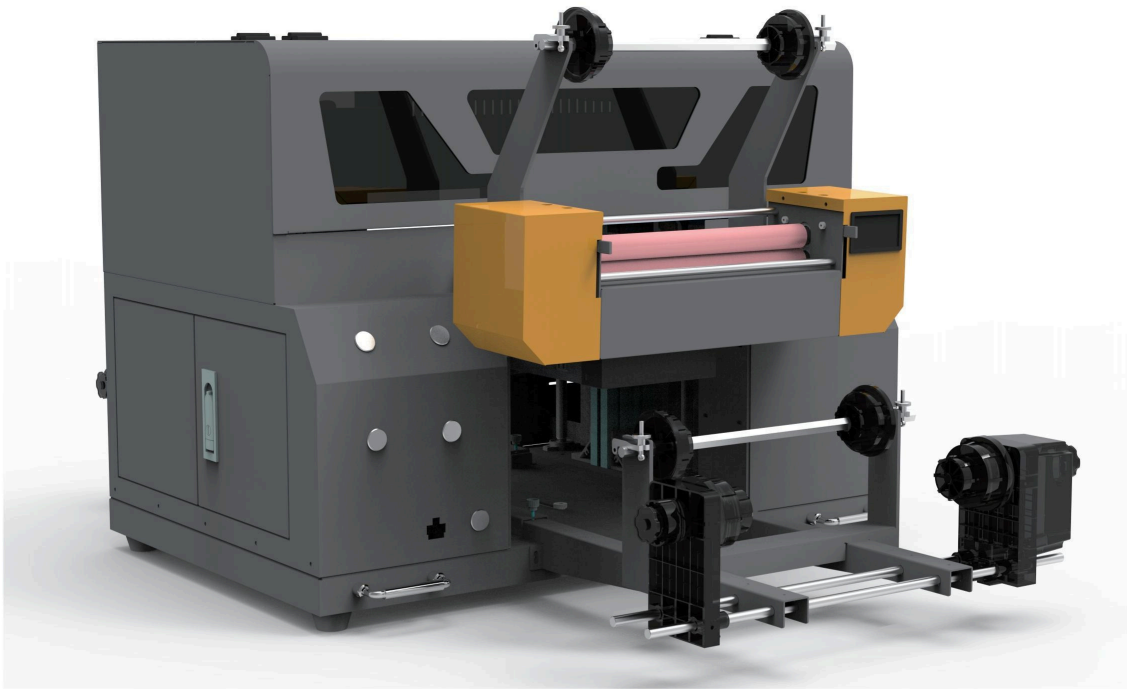

■ 机器特点 / Machine features

卷材 / 圆柱体打印功能兼容，一机三用；
CIS 视觉定位打印功能，自动扫描自动定位（选配）；
高落差打印功能，最高可打印 20mm 凹凸面高度差物体（选配）；
触摸屏人机交互，特殊功能操作机器更直观；
白墨搅拌、循环，减少因待机白墨沉淀引起打印头堵塞和打印效果不良情况；
高精度氧化铝吸风平台，双排 8 风扇超大吸力，打印水晶标 \PVC 卡、证卡、标牌等无需粘贴边缘，即放即打，使用方便；底部设计有折叠把手，方便机器搬运和移动，随时随地开工。

Compatible with roll/cylinder printing function, one machine for three uses;
CIS visual positioning printing function, automatic scanning and positioning (optional);
High drop printing function, capable of printing objects with a maximum height difference of 20mm between concave and convex surfaces (optional);
Touchscreen human-computer interaction, special function operation machine is more intuitive;
Mixing and circulating white ink to reduce clogging of the print head and poor printing results caused by standby white ink sedimentation;
High precision alumina suction platform, double row 8 fans with super large suction power, printing crystal labels, PVC cards, certificates, labels, etc. without the need to stick edges, can be placed and printed immediately, easy to use; The bottom is designed with folding handles for easy machine handling and movement, allowing for work to be done anytime, anywhere.

■ 机器参数 / Machine parameters

产品型号/Product model: HJD-S06						
喷头配置 Sprinkler configuration		爱普生Epson i3200-U1HD (倾斜装配/Tilted mounting)		传动系统 Drivetrain	X轴 X-axis	雷赛一体式步进电机 Leisai integrated stepper motor
墨水 ink		软质LED-UV墨水/Soft LED-UV ink、硬性LED-UV墨水/Hard LED-UV ink: C/M/Y/K/W/V 青色/红色/黄色/黑色/白色/光油			Y轴 Y-axis	升降橡胶胶辊(带覆膜加热)、雷赛一体式步进电机 Lift rubber roller (with film covered heating), Leisai integrated stepper motor
适合材料 Suitable materials		硅胶厚版膜、3D仿刺绣A膜(软墨) Silicone thick film, 3D imitation embroidery A film (soft ink)	水晶标(硬墨) Crystal logo (hard ink)	报警系统 Alarm system	缺墨报警、行程防护、打印中即时保护 Ink shortage alarm, travel protection, real-time protection during printing	
产能 Capacity	生产模式(推荐) (reduction mode (recommended))	692X1800 Dpi / 6pass -2.5㎡/H	692X1800 Dpi / 6pass -5㎡/H	特色功能 Featured Features	喷头斜装增速;白墨搅拌、循环;胶辊恒张力走膜;缺墨报警系统;一体收放卷;喷车防撞; Tilted nozzle installation speed increase; Mixing and circulating white ink; Rubber roller with constant tension for film running; Ink shortage alarm system; Integrated roll up and roll up; Spray car collision prevention;	
	精细模式 Fine mode	692X2400 Dpi / 8pass -1.5㎡/H	692X2400 Dpi / 8pass -3㎡/H			
最佳喷射高度 Optimal spray height		3mm (3D高度2mm内) 3mm (within 2mm of 3D height)	1.8mm	工作环境 Working Condition	温度: 20-28℃ (宜低); 湿度: 45%-65% (宜高) Temperature: 20-28 °C (preferably low); Humidity: 45%-65% (preferably high)	
打印方式 Printing method		白墨+白墨+彩墨+光油/White ink+white ink+colored ink+glossy oil		打包尺寸 Packing size	950x1060x880mm	950x1060x880mm
最大打印幅宽 Maximum print width		平板 300*400mm, 卷材 300mm, 圆柱体 φ30-120mm Flat 300*400mm, roll 300mm, cylinder φ30-120mm		主机尺寸 Host size	880x1330x672mm	2105x860x1590 mm (不含选配切割机/ Excluding optional cutting machine)
喷头维护 Sprinkler maintenance		一体式升降墨栈 Integrated lifting ink stack		整机功率 Whole machine power	打印机-1.2KW / 覆膜加热-0.5KW Printer -1.2KW/Film covered heating -0.5KW	打印机-1.2KW / 覆膜加热-0.75KW Printer -1.2KW/Film covered heating -0.75KW
喷头清洗 Sprinkler cleaning		全自动清洗、全自动刮墨、全自动保湿 Automatic cleaning, automatic scraping, automatic moisturizing		重量 Weight	127KG	210KG
供墨系统 Ink supply system		虹吸供墨系统 Siphon ink supply system		墨桶容积 Ink barrel volume	500ml	
固化方式 Curing Method		UV-LED固化灯(风冷式) UV-LED curing lamp (air-cooled)		电源要求 Power requirements	AC220V±5%, 50Hz~60Hz	
RIP软件 RIP software		蒙泰Maintop(标配) / PhotoPrint (选配/optional) / 锐印Riin (选配/optional) / 小白印象 (选配/optional)		电脑配置 PC configuration	操作系统 operating system	windows7、8、10 64bit 专业版 / Professional Edition
耗材用量 Consumables usage		普通水晶标/Common crystal label: 白墨、光油/White ink & varnish: 25ml/㎡; 彩墨/Color ink: 12ml/㎡; 排废烫金水晶标/Waste-removable hot stamping crystal label: 白墨/White ink: 25ml/㎡; 彩墨/Color ink: 12ml/㎡; 不沾金光油、烫金光油/Anti-stick varnish & hot stamping varnish: 15ml/㎡			硬件要求 hardware requirements	256G以上固态硬盘、8G主频2400hz以上双通道内存条、 2G以上独立显存、酷睿i5处理器(推荐2.5GHz以上频率) 256GB or above solid-state drive 8GB dual channel memory module with a clock frequency of 2400Hz or above, 2GB or above independent video memory, Core i5 processor (recommended frequency of 2.5GHz or above)
					传输接口 Interface	USB 3.0接口/千兆网线/USB 3.0 interface/Gigabit Ethernet cable
板卡 Control Board		北印/BetterPrinter				