


Deluxejet Series four printhead High Precision Printer

Print Head: Epson I3200-A1/E1 Width: 3200mm/1500mm x 2

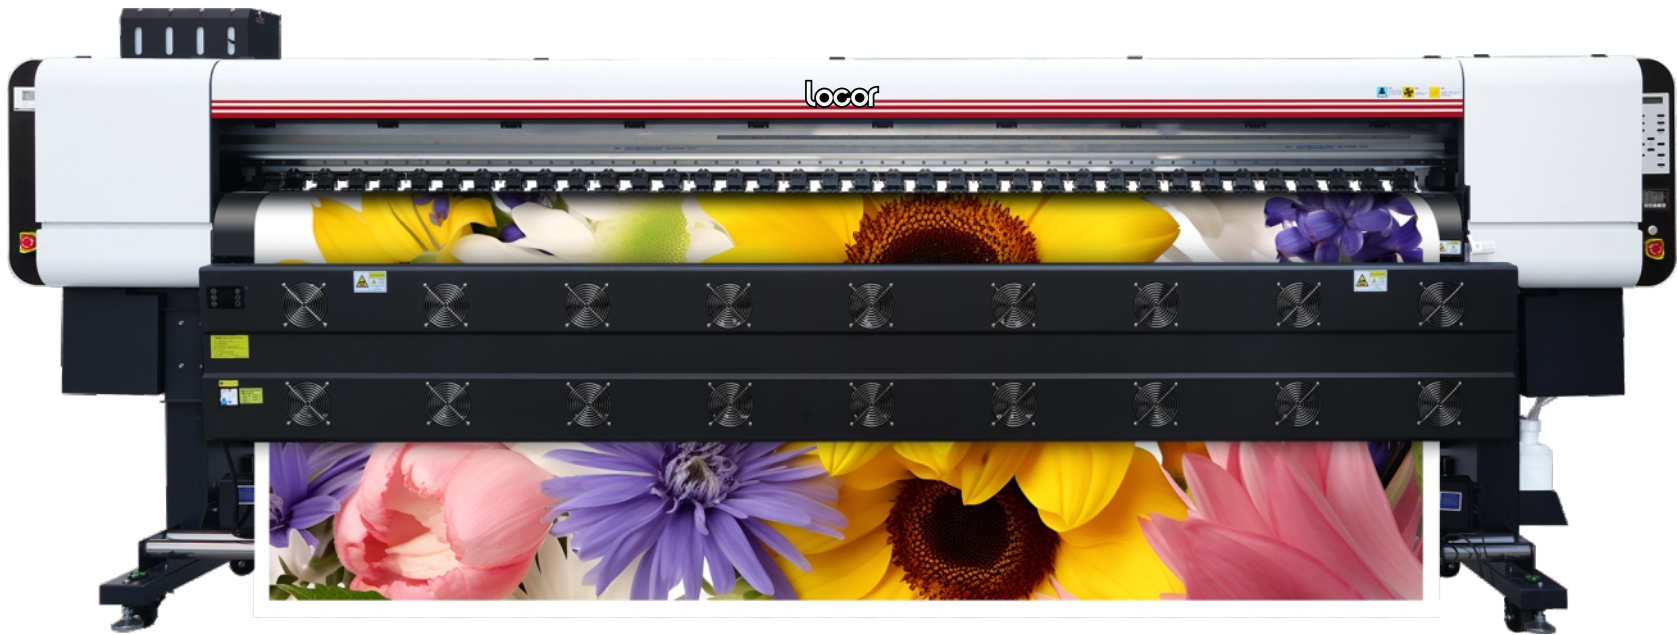

Printing Speed

Type Mode	I3200-A1/E1
3 Pass	120m ² /h
4 Pass	92m ² /h
6 Pass	68m ² /h

High strength body, high intelligent printing

- Using high-quality and high-density steel structure as the body, the platform accuracy can reach about 0.05 mm, ensuring high-speed printing;
- The machine girder made of high strength aluminum alloy is added with girder reinforcement ribs processed by high-precision molds, with high strength and high precision, ensuring the stability of the machine's high strength use and high-quality output;
- Print width: 3200mm/1500mmx2 can freely adjust the size according to your needs;



Intelligent operation printing and high-quality mechanical design




Guide Rails

High-quality guide rails ensure stable printhead movement, high precision, low noise, and long lifespan.



Automatic Paper Sensor

Automatically pauses the printing task when the medium is about to run out.

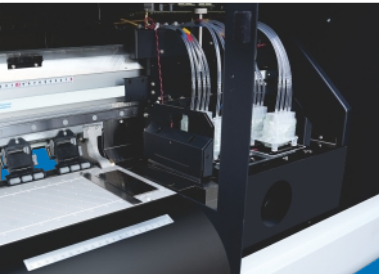

Anti-collision sensor

When the cart touches a foreign object, the switches will be on, and machine stops printing.



Tension Control System

Air shaft + dual-rod feeder prevents stretching or deformation, improving print quality.



Control Panel

12-button operation panel, easy to learn, improves work efficiency.

Product Technical Specifications

*Specifications and configurations are based on the actual product and may change without prior notice.

Product Model		Deluxejet3200	
Printhead Type	I3200-A1/E1	Heating System	Three-Stage Embedded Constant Temperature Heating System (Front, Middle, Rear)
Number of Printhead	4		
Printhead Height	2-3mm	External Drying Configuration	Dual infrared heating with external drying fan
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions	Operation Language	Chinese/English
		Computer System	Win11/Win10
Ink Type	Eco-Solvent / Water-Based / Sublimation Inks	Working Environment	Temperature range 18°C-25°C; Humidity range 35%-65% Rh
Ink Color	Four colors (C/M/Y/K/)	Printing Interface	USB
Ink Cartridge Capacity	3000ml per color	RIP Software	Maintop/Photoprint
Ink Supply Method	Negative pressure continuous ink supply system	Power Parameters	AC-220V, 50Hz/60Hz
Printing Width	3200mm / 1500mm x 2	Power (W)	Standby power 2000W, maximum power 6500W
Media	Photo Paper / PP Paper / Canvas / Rice Paper / Vehicle Vinyl Heat Transfer Paper, and More.	Noise Level	Standby < 32dB, operating ≤65dB
		Machine Dimensions	4610 * 990 * 1778mm (L * W * H)
Maximum Roll Weight	< 100 Kg	Machine Weight	850kg
Take-up Device	Fully Automatic Winding and Unwinding (Standard)	Package Dimensions	4910 * 1120 * 1150mm (L * W * H)