

# Just the Right Breadth Easyjet 1600

Width: 1550



## Printing Speed


| Type<br>Mode | I3200 *1   | F1080 *1   | F1440 *1   |
|--------------|------------|------------|------------|
| 4 Pass       | 24.9m² / h | 18.6m² / h | 17.5m² / h |
| 6 Pass       | 16.4m² / h | 13.4m² / h | 13m² / h   |
| 8 Pass       | 13.5m² / h | 10.3m² / h | 9.3m² / h  |

## Support for greyscale & VSDT


- Ensuring that perfectly circular ink droplets are accurately and consistently placed during the printing process helps achieve compactness, high speed, high quality, and high image quality.
- Support grayscale printing: The print head provides smooth gradients and finer image quality by freely controlling the volume of the ejected droplets.



### Variable droplet



## Intelligent operation printing and high-quality mechanical design

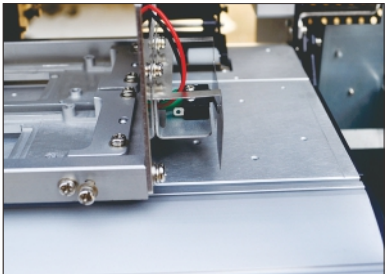

### Anti-collision sensor

When the cart touches a foreign object, the switches will be on, and machine stops printing.



### Automatic Paper Sensor

Automatically pauses the printing task when the medium is about to run out.



### External fans and heater

One external heater and dryer fans was integrated in one part.



### Guide Rails

High-quality guide rails ensure stable printhead movement, high precision, low noise, and long lifespan.



### Cable carrier

Equipped with high-quality cable carriers, featuring high flatness and long-lasting durability.

## Product Technical Specifications

\*Specifications and configurations are based on the actual product and may change without prior notice.

| Product Model          | Easyjet 1601                                                                                      | Easyjet 1602 |                      |                                                                                |
|------------------------|---------------------------------------------------------------------------------------------------|--------------|----------------------|--------------------------------------------------------------------------------|
| Number of Printhead    | 1                                                                                                 | 2            | Heating System       | Three-Stage Embedded Constant Temperature Heating System (Front, Middle, Rear) |
| Printhead Type         | F1080/I3200/I1600/DX5/DX7                                                                         |              | Drying Configuration | Dual infrared heating with external drying fan                                 |
| Printhead Height       | 2-3mm                                                                                             |              | Operation Language   | Chinese/English                                                                |
| Printhead Cleaning     | Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions |              | Computer System      | Win11/Win10/Win7                                                               |
|                        |                                                                                                   |              | Working Environment  | Temperature range 18°C-25°C; Humidity range 35%-65% Rh                         |
| Ink Type               | Eco-Solvent / Water-Based / Sublimation Inks                                                      |              | Printing Interface   | Gigabit Ethernet Port                                                          |
| Ink Color              | 4 colors (C/M/Y/K); 6 colors (C/M/Y/K/Lc/Lm); 8 colors (C/M/Y/K/Lc/Lm/Lk/LLk)                     |              | RIP Software         | Maintop/Photoprint                                                             |
| Ink Cartridge Capacity | 1500ml per color                                                                                  |              | Power Parameters     | AC-220V, 50Hz/60Hz                                                             |
| Ink Supply Method      | Negative pressure continuous ink supply system                                                    |              | Power (W)            | min: 32W; max: 2300W                                                           |
| Printing Width         | 1550mm                                                                                            |              | Noise Level          | Standby < 32dB, operating ≤65dB                                                |
| Media                  | Photo Paper / PP Paper / Canvas / Rice Paper / Vehicle Vinyl Heat Transfer Paper, and More.       |              | Machine Dimensions   | 2380 * 730 * 1475mm (L * W * H)                                                |
|                        |                                                                                                   |              | Machine Weight       | 170 Kg                                                                         |
| Maximum Roll Weight    | < 40 Kg                                                                                           |              | Package Dimensions   | 2445 * 750 * 625mm (L * W * H)                                                 |
| Take-up Device         | Standard Configuration                                                                            |              | Package Weight       | 215 Kg                                                                         |