

# Easyjet 3200 Colossal Splendor Printer

Dual printhead, multiple models available. Width: 3200mm



## Printing Speed


| Type<br>Mode | I3200-A1/E1           | F1080                 | F1440-A1              |
|--------------|-----------------------|-----------------------|-----------------------|
| 4 Pass       | 46m <sup>2</sup> /h   | 33.8m <sup>2</sup> /h | 35.6m <sup>2</sup> /h |
| 6 Pass       | 31m <sup>2</sup> /h   | 26m <sup>2</sup> /h   | 26.7m <sup>2</sup> /h |
| 8 Pass       | 25.5m <sup>2</sup> /h | 19.6m <sup>2</sup> /h | 21.5m <sup>2</sup> /h |

## Support for greyscale & VSDT


- The printhead releases three ink droplet sizes, with small droplets offset for color compensation, improving image detail.
- Customized print curves in printers can better restore the exquisite and smooth gradient effects, crisp text lines, and intricate details of patterns without compromising printing speed.



### Variable droplet



## Intelligent operation printing and high-quality mechanical design

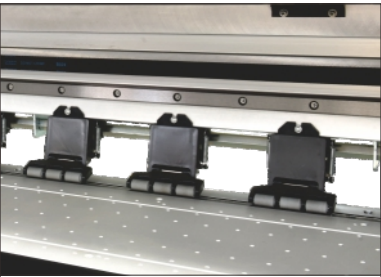

### Guide Rails

High-quality guide rails ensure stable printhead movement, high precision, low noise, and long lifespan.




### Control Panel

12-button operation panel, easy to learn, improves work efficiency.




### Automatic Paper Sensor

Automatically pauses the printing task when the medium is about to run out.

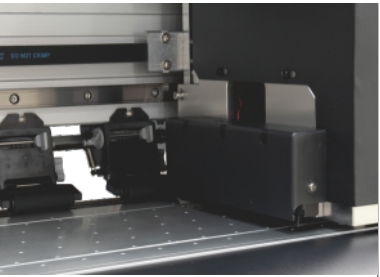

### Anti-collision sensor

When the cart touches a foreign object, the switches will be on, and machine stops printing.

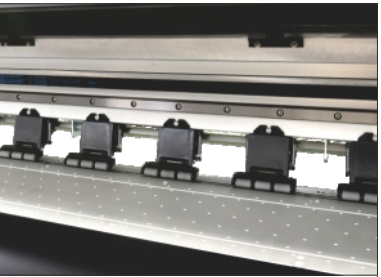

### Machined Platform

Machined one-piece platform ensures high flatness, easy ink suction, and simple printhead cleaning for smooth printing.

## Product Technical Specifications

\*Specifications and configurations are based on the actual product and may change without prior notice.

| Product Model          | Easyjet 3202                                                                                      | Heating System       | Three-Stage Embedded Constant Temperature Heating System (Front, Middle, Rear) |
|------------------------|---------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------|
| Number of Printhead    | 2                                                                                                 | Drying Configuration | Dual infrared heating with external drying fan                                 |
| Printhead Type         | F1080/I3200/I1600/DX5/DX7                                                                         | Operation Language   | Chinese/English                                                                |
| Printhead Height       | 2-3mm                                                                                             | Computer System      | Win11/Win10/Win7                                                               |
| Printhead Cleaning     | Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions | Working Environment  | Temperature range 18°C-25°C; Humidity range 35%-65% Rh                         |
| Ink Type               | Eco-Solvent / Water-Based / Sublimation Inks                                                      | Printing Interface   | Gigabit Ethernet Port                                                          |
| Ink Color              | 4 colors (C/M/Y/K); 6 colors (C/M/Y/K/Lc/Lm); 8 colors (C/M/Y/K/Lc/Lm/Lk/LLk)                     | RIP Software         | Maintop/Photoprint                                                             |
| Ink Cartridge Capacity | 1500ml per color                                                                                  | Power Parameters     | AC-220V, 50Hz/60Hz                                                             |
| Ink Supply Method      | Negative pressure continuous ink supply system                                                    | Power (W)            | min: 32W; max: 2300W                                                           |
| Printing Width         | 3200mm                                                                                            | Noise Level          | Standby < 32dB, operating ≤65dB                                                |
| Media                  | Photo Paper / PP Paper / Canvas / Rice Paper / Vehicle Vinyl Heat Transfer Paper, and More.       | Machine Dimensions   | 4650 * 950 * 1750mm (L * W * H)                                                |
| Maximum Roll Weight    | < 100 Kg                                                                                          | Machine Weight       | 0 Kg                                                                           |
| Take-up Device         | Standard Configuration                                                                            | Package Dimensions   | 0 * 0 * 0mm (L * W * H)                                                        |
|                        |                                                                                                   | Package Weight       | 0 Kg                                                                           |