

Long-lasting Performance & Wider Printing Width

8-Head Digital Textile Printer

Printhead: Epson i3200-A1 Width: 2600mm



Printing Speed

- Four-Color, Eight-Head High-Resolution Printing Speeds

1 Pass 440m²/h


2 Pass 210m²/h



Product Features


- **Strong Frame:** Steel side plates for stability, supports long paper rolls, reduces media changes, saving time and labor.
- **Tension Control:** Adjusts feed for consistent tension, minimizing issues from media weight or core shape.
- **Feeding/Winding System:** Handles different material sizes, ensuring neat winding.
- **Dual Dryers:** Improves drying efficiency, saving time.
- **Adjustable Motor:** 70% faster than traditional motors, ensures smooth paper feeding.

Intelligent operation printing and high-quality mechanical design

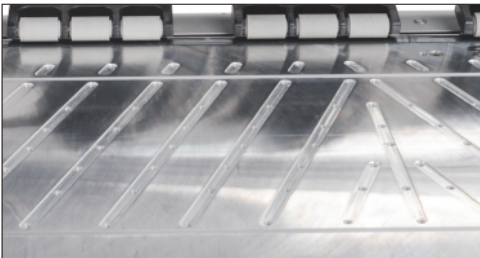

Ventilated Honeycomb Platform

Ensures smooth material feeding, prevents paper warping, improves output quality, and allows for easier platform calibration and adjustment.

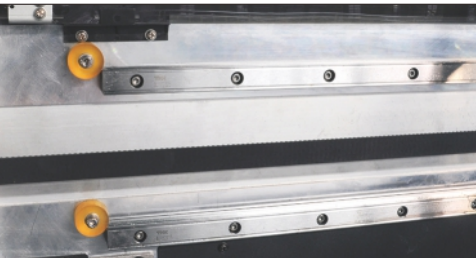

Dual Guide Rails

Equipped with THK silent dual guide rails, ensuring smoother vertical high-speed operation and higher printing precision.



High-Power Dual Dryers

Equipped with dual dryers to speed up ink drying, ensuring smooth paper feeding and collection for high-speed printing.



5000ML Large Ink Cartridges

Larger capacity reduces refills, saving time and labor. Built-in alarms alert for low ink, ensuring uninterrupted printing operation.

Product Technical Specifications

*Specifications and configurations are based on the actual product and may change without prior notice.

Product Model	LC-2608		
Printhead Type	Epson i3200-A1	Heating System	Three-Stage Embedded Constant Temperature Heating System (Front, Middle, Rear)
Number of Printhead	8		
Printhead Height	2-3mm	External Drying Configuration	Dual infrared heating with external drying fan
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions	Operation Language	Chinese/English
		Computer System	Win11/Win10
Ink Type	Dye-sublimation ink	Operating Environment	Temperature range 18°C-25°C; Humidity range 35%-65% Rh
Ink Color	Four colors (C/M/Y/K)	Printing Interface	USB
Ink Cartridge Capacity	5000ml per color	RIP Software	Maintop/Photoprint/Wasatch
Ink Supply Method	Negative pressure continuous ink supply system	Power Parameters	AC-220V, 50Hz/60Hz
Printing Width	2600mm	Power (W)	Standby power 64W, maximum power 7800W
Media	Heat transfer paper	Noise Level	Standby < 32dB, operating ≤65dB
Maximum Roll Weight	Kilometer paper weight (optional)	Machine Dimensions	4430mm x 1235mm x 1850mm (L x W x H)
Take-up Device	Air shaft automatic winding and unwinding system	Machine Net Weight	850 Kg