


滚筒地毯机
 Roller Press Carpet Printing Machine

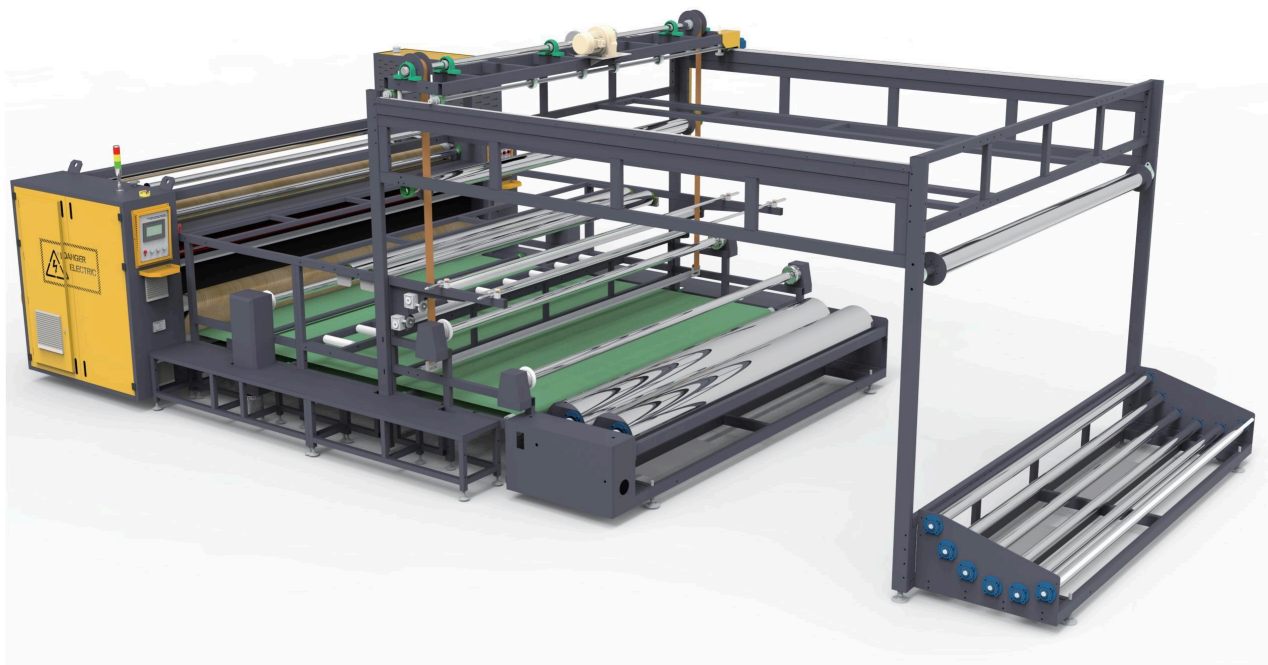

机器参数 / Machine parameters

滚筒地毯机配置及参数(HJD-DP08) Roller Press Carpet Printing Machine			
型号/Model	600x2600/3200/4200	800x2600/3200/4200	1000x2600/3200/4200
电源配置/Power configuration	三相四线 380V50Hz / Three-phase four-wire 380V50Hz		
功率/power	80/97/125KW	105/125/165KW	130/155/200kw
加热方式/Heating method	加热管油温型/Heating tube oil temperature type		
滚筒直径/Drum diameter	600/800/1000mm		
印花有效面积/Print effective area	2600/3200/4200mm		
满油/Full of oil	100%满油/100% full of oil		
油箱放置方式/How the tank is placed	外置开放式/Exterior open		
油位显示/Oil level display	有/Yes		
操作方式/Mode of operation	触屏操作/Touch screen operation		
自动开关机/Automatic power on and off	定时开机, 定温关机/Timed startup, timed shutdown		
毛毡材料/Felt material	100%芳纶Nomex, 10mm/ 100% Aramid Nomex, 10mm		
毛毡自动纠偏系统/Felt automatic guiding system	有/Yes		
气胀轴/Air rising shaft	5根钢制:放画纸2根, 收画纸1根, 收衬纸1根, 放衬纸1根(直径 73) 5 pieces of steel: 2 pieces of drawing paper, 1 piece of drawing paper, 1 piece of backing paper, and 1 piece of backing paper (diameter 73)		
防夹手/Anti-pinch hand	防止操作人员操作时夹手烫伤 Prevent the operator from burning his hands		
轴承加油机/Bearing dispenser	便于给加热辊轴承加油延长轴承寿命防止抱死 Easy to add oil to the heating roller bearings to extend their lifespan and prevent them from locking up		
离合器/clutch	气动离合, 可视化张力调整避免进料褶皱 Pneumatic clutch, visual tension adjustment to avoid feeding wrinkles		
收放卷机/Roll up and roll up machine	大尺寸卷材电动收料省时省力 Large size coil electric feeding saves time and effort		
电动行吊/Electric crane	大卷材不易搬运的使用行吊轻松移动 Large roll materials that are difficult to transport can be easily moved using a crane		
	可升级配置 Upgradeable configuration		
自动排烟/Automatic smoke exhaust	滚筒自带排烟装置, 降低室内空气污染/The drum comes with a built-in smoke exhaust system to reduce indoor air pollution		
Wifi功能/Wifi function	连接 Wifi功能后可使用手机远程控/ After connecting to the WiFi function, remote control can be achieved using a mobile phone		